




- ① Secure blanket to ground according to manufacturer's recommended anchoring pattern and anchor density (minimum 1.3 anchors per square yard).
- ② Install staples at 1 foot on center.

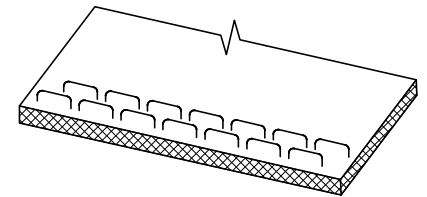


STAPLE CHECK
(Two rows of staples at 4" on center and staggered 4" apart)

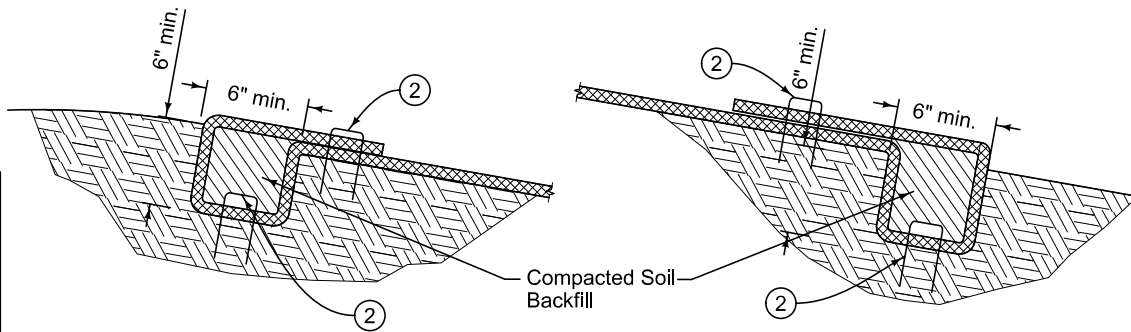

UPSLOPE AND TERMINAL END ANCHOR TRENCH



END LAP



EDGE LAP
(4'-0" min. anchor spacing)

FIGURE 9040.103 SHEET 1 OF 1

	REVISION
	3 2025 Edition
	9040.103
SHEET 1 of 1	

SUDAS Standard Specifications

**ROLLED EROSION CONTROL
PRODUCT (RECP)
INSTALLATION ON SLOPES**