


# Runoff Examples

## A. Rational Method Example

- 1. Problem Statement:** A 2 acre commercial site (350 feet by 250 feet) is being developed with a new building and parking lot. The site drains to a culvert located at the northwest corner of the property. The hydraulically most distant point is located at the southeast corner of the property. Runoff from the SE corner of the property flows west, through a driveway culvert under the south drive, and then north to the main culvert. The average slope along this route is 3%. All runoff drains to the northwest corner and the site does not have any off-site drainage.

Assuming this site is located in Iowa Climactic Section 4, with Group C soils; use the Rational Method to determine the peak runoff from the property.

**Figure 2B-6.01:** Example Commercial Development

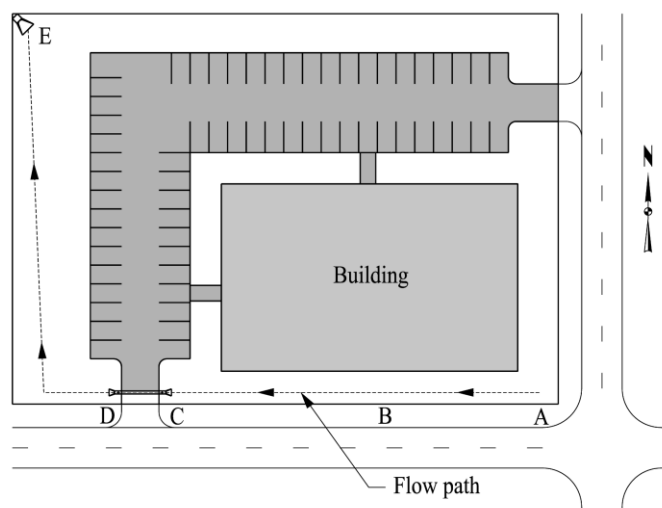

- 2. Time of Concentration:** The first step in calculating the peak runoff rate is determining the Time of Concentration. For the Rational Method, the Velocity Method, as described in [Section 2B-3](#), is typically used to calculate  $T_c$ .

The velocity method consists of three components, sheet flow, shallow concentrated flow, and open channel flow.

**Table 2B-6.01:** Site Conditions for Rational Method Example

Segment	Flow Type	Segment Properties
A-B	Sheet	Dense Grass, Slope = 2.0%, Length = 100'
B-C	Shallow Con. Flow	Grassed Waterway, Slope = 2.0%, Length = 140'
C-D	Pipe Flow	12" RCP, Assume 1/2 pipe flow, Slope = 1.0%, Length = 140'
D-E	Open Channel	Earth channel with short grass, Slope = 2.0%, Length = 275' Assume a rectangular channel with 6' bottom and flow depth of 4"

**Worksheet 2B-6.01: Time of Concentration (T<sub>c</sub>) or Travel Time (T<sub>t</sub>)**

Project	By	Date
Location	Checked	Date
Check one: <input type="checkbox"/> Present <input checked="" type="checkbox"/> Developed Check one: <input checked="" type="checkbox"/> T <sub>c</sub> <input type="checkbox"/> T <sub>t</sub> through subarea Notes: Space for as many as two segments per flow type can be used for each worksheet. Include a map, schematic, or description of flow segments.		
<b>Sheet flow (Applicable to T<sub>c</sub> only)</b>		
Segment ID	AB	
1. Surface description ( <a href="#">Table 2B-3.01</a> ).....	Dense Grass	
2. Manning's roughness coeff., n ( <a href="#">Table 2B-3.01</a> ) .....	0.24	
3. Flow Length, L (Total 100' max.) .....	ft 100	
4. 2 year 24 hour rainfall, P <sub>2</sub> ( <a href="#">Section 2B-2</a> ) .....	in 3.01	
5. Land slope, s .....	ft / ft 0.02	
6. Travel Time, $T_t = \frac{0.007(nL)^{0.8}}{(\sqrt{P_2})(s)^{0.4}}$ , ( <a href="#">Eq. 2B-3.03</a> ) .....	hr 0.25	+ <input style="width: 40px; height: 20px;" type="text"/> = <input style="width: 40px; height: 20px; border: 1px solid black;" type="text" value="0.25"/>
<b>Shallow concentrated flow</b>		
Segment ID	BC	
7. Surface description ( <a href="#">Figure 2B-3.01</a> ).....	Grassed waterway	
8. Flow length, L.....	ft 140	
9. Watercourse slope, s .....	ft / ft 0.02	
10. Average velocity, V ( <a href="#">Fig. 2B-3.01</a> or <a href="#">Table 2B-3.02</a> )	ft / s 2.3	
11. Travel Time, $T_t = \frac{l}{3600V}$ , ( <a href="#">Eq. 2B-3.01</a> ).....	hr 0.02	+ <input style="width: 40px; height: 20px;" type="text"/> = <input style="width: 40px; height: 20px; border: 1px solid black;" type="text" value=".02"/>
<b>Open channel / pipe flow</b>		
Segment ID	CD	DE
12. Cross sectional flow area, A ( <a href="#">Section 2F-2</a> ) .....	ft <sup>2</sup> 0.39	2
13. Wetted perimeter, P <sub>w</sub> ( <a href="#">Section 2F-2</a> ) .....	ft 1.57	6.67
14. Hydraulic radius, $R = \frac{A}{P_w}$ ( <a href="#">Section 2F-2</a> ) .....	ft 0.25	0.30
15. Channel slope, s.....	ft / ft 0.01	0.02
16. Manning's roughness coefficient, n.....	0.013	0.027
17. Velocity, $V = \frac{1.49(r^{2/3})(s^{1/2})}{n}$ , ( <a href="#">Eq. 2B-3.04</a> ) .....	ft / s 4.55	3.5
18. Flow length, L.....	ft 140	275
19. Travel Time, $T_t = \frac{l}{3600V}$ , ( <a href="#">Eq. 2B-3.01</a> ).....	hr 0.01	+ <input style="width: 40px; height: 20px;" type="text"/> 0.02 = <input style="width: 40px; height: 20px; border: 1px solid black;" type="text" value="0.03"/>
20. Watershed or subarea T <sub>c</sub> or T <sub>t</sub> (add T <sub>t</sub> in steps 6, 11 and 19).....	<b>hr <input style="width: 40px; height: 20px; border: 1px solid black;" type="text" value="0.30"/></b>	

From Worksheet 2B-6.01, the time of concentration is 0.30 hours (18 minutes).

3. **Runoff Coefficient:** The county soil survey indicates the existing soils are Group C. Because this site is being regraded and developed, it is assumed that the resulting soil profile will more closely resemble Group D soils due to compaction during construction.

Because the drainage area contains multiple surfaces, a composite runoff coefficient must be determined. The values for the Rational coefficient are provided in [Table 2B-4.01](#). A summary of the surface areas and associated Rational coefficients for the site is provided in [Table 2B-6.02](#) below.

The 5 year composite runoff coefficient ( $C_5$ ) for the site is calculated by finding the overall average:

$$C_5 = \frac{(27,282 \times 0.95) + (22,800 \times 0.95) + (36,818 \times 0.5)}{87,500} = 0.75$$

The 100 year is found in a similar manner.

**Table 2B-6.02:** Summary of Surface Areas for Rational Method Example

Proposed Surface	Area (sf)	Rational Coefficient	
		5 year	100 year
Parking Lot and Sidewalk	27,282	0.95	0.98
Building	22,800	0.95	0.98
Lawn (good condition)	36,818	0.50	0.65
Total / Composite	87,500 (2 acres)	0.75	0.83

4. **Peak Runoff:** The Rational method requires three components to calculate peak runoff: runoff coefficient, rainfall intensity, and drainage area. The runoff coefficient was determined in number 3 above and the area was given above as 2 acres. The only missing component is the rainfall intensity (i).

The rainfall intensity is found in the rainfall depth and intensity tables in [Section 2B-2](#). This site is located in Iowa climactic zone 4 so [Table 2B-2.05](#) is utilized. The time of concentration was calculated as 18 minutes. For design, the  $T_c$  is typically rounded down to the next standard duration; in this case is 15 minutes. From [Table 2B-2.05](#), the 5 year and 100 year intensities for a 15 minute  $T_c$  are 3.96 and 7.46 inches/hour respectively.

The peak runoff rate is determined from [Equation 2B-4.01](#) as follows:

$$Q_5 = 0.75 \times 3.96 \times 2.0 = \underline{5.9 \text{ cfs}}$$

$$Q_{100} = 0.83 \times 7.46 \times 2.0 = \underline{12.4 \text{ cfs}}$$

## B. SCS Method Example

- 1. Problem Statement:** A watershed covers 180 acres in Carroll County, Iowa. The current land use is agricultural with 60 acres in pasture and 120 acres in active corn and soybean production (row crops). The cultivated portion has been contoured and terraced and is farmed utilizing no-till farming practices (crop residue). The entire watershed is in good hydrologic condition and the county soil survey indicates that this area contains group B soils.

A new, 60 acre development near the upstream end of this watershed is being considered for construction of single family one-acre lots. This development is being proposed in the cultivated portion of the watershed. It is estimated that the development will contain approximately 35% impervious area (streets, driveways, homes, outbuildings, etc.)

Determine the peak runoff rates for the watershed before and after development.

- 2. Curve Number:** The first step is to determine the existing and proposed curve number (CN) for the watershed. CN values are provided in [Tables 2B-4.03](#) through [2B-4.05](#). The value for row crops, contoured and terraced with crop residue is 70 for a good hydrologic soil condition and soil group B (from [Table 2B-4.04](#)). For pasture, the value is 61 ([Table 2B-4.05](#)).

The value for the proposed developed condition must also be obtained. The original land was assessed as a group B soil; however, given the compaction that occurs as a result of mass grading and construction, it is likely that the soil condition will be reduced to a Group C or D soil. A Group C soil is assumed for this example. [Table 2B-4.03](#) includes CN values for 1 acre residential lots; however, these values assume an impervious area of 20%. The assumed impervious area of this development is 35% as stated above. Therefore the impervious and pervious (lawn) areas will be assessed separately.

A composite CN must be determined to represent the average CN of the entire watershed. This is done by determining a weighted average, based upon ground area. This is shown in Worksheets 2B-6.02 and 2B-6.03.

- 3. Time of Concentration:** The time of concentration may be determined with either the Velocity or Lag methods. In this example the Lag method, as described in [Section 2B-3](#), will be used.

Assume the watershed has a flow length of 4,700 feet and an average land slope of 8.0 percent. The example calculation for  $T_c$  is shown in Worksheets 2B-6.02 and 2B-6.03.

For the developed example in Worksheet 2B-6.03, an adjustment for urbanization was applied. This process is necessary when utilizing the lag method in developed areas.

- 4. Runoff:** The total runoff, in inches, from the watershed and the peak rate of runoff is then determined as shown in the worksheets below.

**Worksheet 2B-6.02: Runoff Curve Number and Runoff - Existing Conditions**

Project: SCS Example – Existing Conditions	By	Date
Location: Carroll County, Iowa	Checked	Date

Check one:  Present  Developed

**1. Runoff Curve Number**

Soil name & hydrologic group  (County soil survey)	Cover Description  (cover type, treatment and hydrologic condition; percent impervious; unconnected/connected impervious area ratio)	CN <sup>1</sup>			Area  <input checked="" type="checkbox"/> ac <input type="checkbox"/> mi <sup>2</sup> <input type="checkbox"/> %	CN x Area
		<a href="#">Tables 2B-4.03, 4.04, &amp; 4.05</a>	<a href="#">Figure 2B-4.01</a>	<a href="#">Figure 2B-4.02</a>		
Marshall, B	Row crops with contouring, terracing, and crop residue.	70			120	8,400
Marshall, B	Pasture, continuous forage	61			60	3,660
<sup>1</sup> Use only one CN source per line					Totals ➔	180 12,060

$$CN \text{ (weighted)} = \frac{\text{Total product}}{\text{total area}} = \frac{12060}{180} = 67$$

Use CN ➔

$$\text{Potential max. retention, } S = \frac{1000}{67} - 10 = 4.9 \text{ (Eq. 2B-4.07)}$$

S ➔

**2. Time of Concentration**

$$\text{Watershed Lag, } L = \frac{4700^{0.8}(4.9+1)^{0.7}}{1900(8.0)^{0.5}} = 0.56 \text{ (Eq. 2B-3.05)}$$

$$T_c = \frac{0.56}{0.6} = 0.93 \text{ hr (Eq. 2B-3.05)}$$

T<sub>c</sub> ➔

**3. Runoff**

	Storm #1	Storm #2	Storm #3
Frequency ..... yr	5	100	
Rainfall, P (24-hour) ('D' from tables in <a href="#">Section 2B-2</a> )..... in	3.74	7.67	
Runoff, $Q = \frac{(P-0.2S)^2}{(P+0.8S)}$ (Eq. 2B-4.06)..... in	1.0	3.8	

**4. Peak Runoff Rate**

	Storm #1	Storm #2	Storm #3
Ratio of Initial abstraction to Rainfall $\frac{I_a}{P} = \frac{0.2 \times S}{P}$ .....	0.26	0.13	
Coef. for Peak Discharge ( <a href="#">Table 2B-4.06</a> - interpolated) C <sub>0</sub>	2.48290	2.54004	
C <sub>1</sub>	-0.62108	-0.62630	
C <sub>2</sub>	-0.12606	-0.15691	
Unit peak runoff, q <sub>u</sub> (Eq. 2B-4.09) ..... ft <sup>3</sup> /s/mi <sup>2</sup>	318	363	
Peak Runoff $q_p = q_u \times \frac{\text{Area}(ac)}{640 \frac{ac}{mi^2}} \times Q \times F_p$ (Eq. 2B-4.08) cfs	<b>89</b>	<b>388</b>	

Worksheet 2B-6.03: Runoff Curve Number and Runoff - Proposed Conditions

Project: SCS Example – Existing Conditions	By	Date
Location: Carroll County	Checked	Date

Check one:  Present  Developed

1. Runoff Curve Number

Soil name & hydrologic group  (County soil survey)	Cover Description  (cover type, treatment and hydrologic condition; percent impervious; unconnected/connected impervious area ratio)	CN <sup>1</sup>			Area  <input checked="" type="checkbox"/> ac <input type="checkbox"/> mi <sup>2</sup> <input type="checkbox"/> %	CN x Area
		<a href="#">Tables 2B-4.03, 4.04, &amp; 4.05</a>	<a href="#">Figure 2B-4.01</a>	<a href="#">Figure 2B-4.02</a>		
Marshall, B	Row crops with contouring, terracing, and crop residue.	70			40	2,800
Marshall, B	Pasture, continuous forage	61			60	3,660
Marshall, C	Open space, lawn in good condition	74			52	3,848
Marshall, C	Impervious area (streets, roofs, etc).	98			28	2,744
Totals ➔					180	13,052

<sup>1</sup>Use only one CN source per line

$$CN \text{ (weighted)} = \frac{\text{Total product}}{\text{total area}} = \frac{13052}{180} = 73$$

Use CN ➔

$$\text{Potential max. retention, } S = \frac{1000}{73} - 10 = 3.7 \text{ (Eq. 2B-4.07)}$$

S ➔

2. Time of Concentration

$$\text{Watershed Lag, } L = \frac{4700^{0.8}(3.7+1)^{0.7}}{1900(8.0)^{0.5}} = 0.48 \text{ (Eq. 2B-3.05)}$$

$$T_c = \frac{0.48}{0.6} = 0.80 \text{ hr (Eq. 2B-3.05)}$$

For lag method, adjust for urbanization: % impervious = 28 ac / 180 ac = 16%

From [Figure 2B-3.03](#), Imp. Factor = 0.9. No channel improvements assumed.

$$T'_c = 0.80 \times 1.0 \times 0.9 = 0.72 \text{ (Eq. 2B-3.07)}$$

T<sub>c</sub> ➔

3. Runoff

	Storm #1	Storm #2	Storm #3
Frequency ..... yr	5	100	
Rainfall, P (24-hour) ('D' from tables in <a href="#">Section 2B-2</a> )..... in	3.74	7.67	
Runoff, $Q = \frac{(P-0.2S)^2}{(P+0.8S)}$ (Eq. 2B-4.06)..... in	1.3	4.5	

4. Peak Runoff Rate

	Storm #1	Storm #2	Storm #3
Ratio of Initial abstraction to Rainfall $\frac{I_a}{P} = \frac{0.2 \times S}{P}$ .....	0.20	0.10	
Coef. for Peak Discharge ( <a href="#">Table 2B-4.06</a> - interpolated)	C <sub>0</sub>	2.50928	2.55323
	C <sub>1</sub>	-0.61885	-0.61512
	C <sub>2</sub>	-0.1403	-0.16403
Unit peak runoff, q <sub>u</sub> ( <a href="#">Eq. 2B-4.09</a> ) ..... ft <sup>3</sup> /s/mi <sup>2</sup>	390	438	
Peak Runoff $q_p = q_u \times \frac{\text{Area}(ac)}{640 \text{ ac}/mi^2} \times Q \times F_p$ ( <a href="#">Eq. 2B-4.08</a> ) cfs	143	554	